



Sewing machine Division of Fujioka Newlong Industrial Co., Ltd. factory was granted ISO9001 Certifications on October 18, 1999.

BAG CLOSING MACHINE HEAD WITH ENCLOSED OIL BATH LUBRICATION

DS-9 SERIES

2,700 R.P.M. OBTAINED WITH LOW VIBRATION




This precision built sewing head is not only the fastest bag closing machine but also the most versatile of heads currently available. Suitable for closing paper, pp woven cloth, Jute and in fact every type of open mouth sack. Model DS-9A·DS-9C, running smoothly as its maximum speed of 2,700 rpm., leads to higher production and greater cost efficiency. The Oil Bath Lubrication system is enclosed and completely maintenance free; due to this unique but simple system no oil pump or oil pipes are used. Moving parts are sealed against dust ensuring maximum productivity and minimum service.

NEWLONG INDUSTRIAL CO., LTD.

MM-006

NEWLONG INDUSTRIAL CO., LTD.

DEMEENSIONS

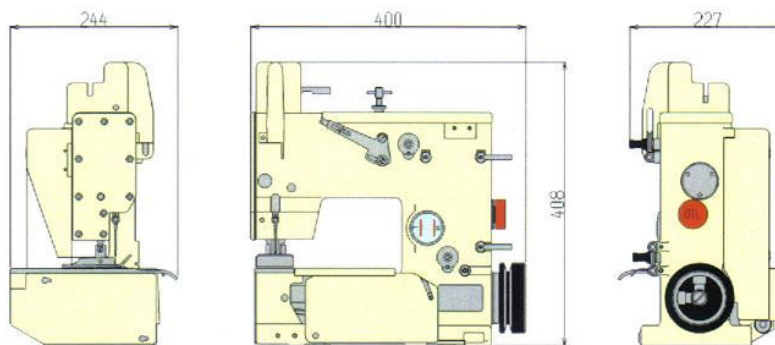

●Dimensions are subject to change without notice.

SPECIFICATION FOR MODEL DS-9A & DS-9C

Max. Speed	2,700r.p.m for DS-9A & DS-9C 2,500r.p.m for DS-9AW & DS-9CW
Stitch Width	DS-9A 7-11.5mm DS-9C 7-10.5mm (Standard setting 10mm)
Closing Type	DS-9A for plain closing only DS-9C for plain & tape bound closing
Cutter Type	DS-9A mechanically operated cutter DS-9C air cylinder operated cutter
Air Pressure	0.4 Mpa (DS-9C)
Air Consumption	3.5 NL/min (DS-9C)
Lubrication System	Automatic Oil Bath System (Maintenance free oiling system)
Oil Feeding Volume	1,740cc (approx.) (Recommended oil : Shell Tellus Oil #32)
Needle Type	DR-H30 #26
Thread	Synthetic or Cotton, 20/6, 20/9
Motor Required	0.75kW, 4P, 3 Phase (not included)
Net Weight	40 kg (approx.)
Measurement	7 cft.

- Options : Thread break detector, Single thread, Needle thread Oiler.
- Specifications subject to change without notice.

MODEL DS-9A is equipped with mechanically operated continuously running thread cutter.
 MODEL DS-9C is equipped with air cylinder driven guillotine cutter for thread / crepe-tape.
 MODEL DS-9AW and DS-9CW are two-needle type closing machine by providing strong double seams.

HONG KONG [NL INDUSTRIAL ASIA LIMITED]	Room 1709A, 17/F, Tower 1, China Hong Kong City, 33 Canton Road, Tsimshatsui, Kowloon, Hong Kong		
	TEL NO. (852) 2735-0199	FAX NO. (852) 2735-0216	http://www.nlindustrial.com.hk/
SHANGHAI [SHANGHAI NEWLONG PACKAGING EQUIPMENT CO., LTD.]	Room 906, Shen Xin Mansion, No. 200 Ning Hai East Road, Shanghai, P.R. China		
	TEL NO. 021-6374-4961	FAX NO. 021-6374-7495	
TAIPEI [NEWLONG INDUSTRIAL TAIWAN BAGGING MACHINE CO., LTD.]	6F., No.19, Sec.3, Minsheng Eastroad, Taipei, Taiwan, R.O.C.		
	TEL NO.886-2-25032226	FAX NO. 886-2-25032189	
TAICHUNG BRANCH OFFICE [NEWLONG INDUSTRIAL TAIWAN BAGGING MACHINE CO., LTD.]	2FL. No.706, Young Chun Tung RD. Nan Tun Dist. Taichung, Taiwan, R.O.C.		
	TEL NO.(04)2386-2748	FAX NO. (04) 2386-2749	
KAOHSIUNG BRANCH OFFICE [NEWLONG INDUSTRIAL TAIWAN BAGGING MACHINE CO., LTD.]	FL.6, No.4, Lane 416, Linsen RD., Fengshan City, Kaohsiung County, Taiwan, R.O.C.		
	TEL NO. 886-7-711-5335	FAX NO. 886-7-711-5443	
USA [MIDWEST PACKAGING EQUIPMENT COMPANY]	5531 Yeager CT. Indianapolis, IN 46237-2340		
	TEL NO. (317) 787-6772	FAX NO. (317) 788-9611	http://www.mwpkg.com/



NEWLONG INDUSTRIAL CO., LTD.

8-14, Shiratori 4-chome, Katsushika-ku, Tokyo 125-0063, Japan

Tokyo Head Office PHONE +81-3-3603-2276 FAX +81-3-3603-2253
 Mechanical Design Engineering Dept PHONE +81-3-3603-2252 FAX +81-3-3602-2694

NLI Group Home Page URL/E-mail

URL <http://nlwww.com/>
 E-mail info@nlwww.com